

PNEUMATIC ROLLER

SR26T

Ready for heavy-duty roadwork

- ▶ Engine model: Shangchai SC8D156G2B1
- ▶ Rated power: 115 kW/2000 rpm
- ▶ Max. operating weight: 26 t

Product features

With electrohydraulic transmission control, torque converter, smooth, non-impact drive system for decreased shearing, double ground friction breaking torque, the Shantui SR26T is ready to hit the road and get the job done. Dual safety systems plus left and right directional foot accelerators, foot brake and electronic gauges help keep the SR26T productive. Powered by an in-line, water-cooled, four-cylinder turbo-charged direct-injection Shangchai SC8D156G2B1 engine.



SHANTUI

VALUE THAT WORKS

Shantui Construction Machinery Co., Ltd.

ADDRESS:

No. 58, G327 Highway
Jining City, Shandong, CHINA

TEL: +86-537-2909369

FAX: +86-537-2311219

EMAIL: trade@shantui.com

PNEUMATIC ROLLER

SR26T

Technical specifications:

Overall length: 5060 mm

Minimum turning radius: 8800 mm

Overall width: 2845 mm



Fuel capacity: 180 L

Overall height: 3480 mm

SR26T

WEIGHT AND DIMENSIONS			
	Weights	Minimum operating weight	14500 kg
		Metal ballast	7000 kg
		Water ballast	4500 kg
		Maximum working weight	26000 kg
	Compaction characteristic	Working width	2750 mm
		Tire distance	490 mm
		Ground pressure	250~420 kPa
		Wheelbase	3840 mm
		Front/rear tire overlap	50 mm
		Front tire oscillation	±50 mm
Tires	Number of tires, front/rear	Front: 5/rear: 6	
	Tire size	11.00-20	
ENGINE AND DRIVE TRAIN			
	Engine	Make & model	Shanghai SC8D156G2B1
		Type	Turbocharged
		Fuel	Diesel
		Cooling	Water
		Number of cylinders	6
		Rated power	115 kW
		Rated speed	2000 rpm
	Drive train	Minimum ground clearance	290 mm
		Maximum climbing ability	20 %
		Forward speed	I 0~8 km/h II 0~20 km/h
Reverse speed	I 0~8 km/h		
CABIN & CONTROLS			
	Electrical system	DC, negative ground	24 V
		Alternator	28 V, 55 A
	Brakes	Service brake	Caliper dry disc
		Parking brake	Spring-loaded/mechanical
	Steering	Steering system	Hydraulic
		Steering method	Articulation
		Steering angle	±33°
		Steering radius	8.5 m

OVERALL DIMENSIONS

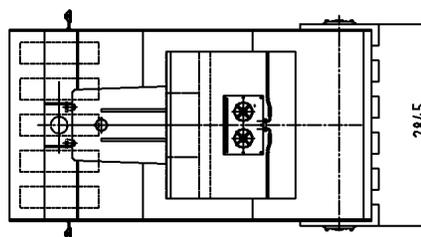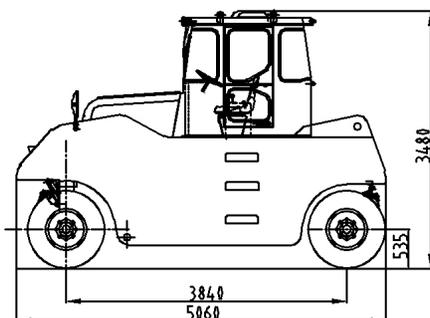

▶ THE SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE. THE PICTURES MAY INCLUDE OPTIONS. THE ACTUAL COLOR & APPEARANCE OF THE PRODUCT MAY DIFFER FROM WHAT IS SHOWN.